EN

maxi orange

CONDENSATE REMOVAL PUMP

Need more performance? Designed for larger units, the Maxi Orange pump gives you the extra power when you need it.

- 35L/h max. flow
- 15m max. rec. head (flow rate 10L/h)
- 35dB(A)

KEY FEATURES

- High power motor
- Superior performance
- Submersible secondary reservoir included

SUITABILITY

- Up to 46kW / 157,000Btu/h
- High wall split systems; Ducted units; Floor standing & Chassis units

✓**Perfect for...** Large commercial units

0.45† kg

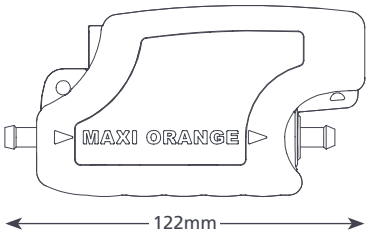





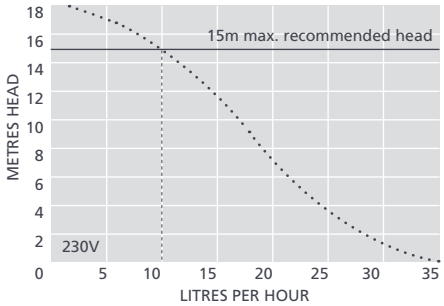

MAXI ORANGE SPECIFICATIONS	
Max. flow	35L/h @ 0 head
Max. rec. head	15m
Max. suction lift	2m
Sound level@1m	35dB(A)
Power supply	230V AC 50-60Hz 0.1A*
Rated	Non continuous
Class	II appliance ⧈
Max. unit output	46kW / 157,000Btu/h
Max. water temp	40°C / 104°F
Discharge tube	6mm ID
IP Protection	IPX1
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

MAXI ORANGE OPTIONS	
Maxi Orange	FP2210

* Other voltages available
† Pump only

SUGGESTED XTRA ACCESSORIES		
Description		Part No.
1 Amp Fuse		FP2620
Tube To Soil Stack Adaptor		FP2038
Vinyl Tube Braided 1/4" (6mm)		AX5100
Inline Filter 16mm		FP2640

Xtra For more installation accessories take a look at our Aspen Xtra range

IN THE BOX

Maxi Orange pump • 1.5m Plug & play power cable • Reservoir • Reservoir lid with 1.5m sensor cable • Submersible reservoir • Anti siphon device • Float & filter • 1.5m Suction tube 6mm ID • 220mm Orange inlet hose 14mm ID • 150mm Vinyl breather tube 6mm ID • Drain connector kit • Fixing kit • Install manual

Download manual at aspenpumps.com

View install video at aspenpumps.com